

The Characteristics of Five Ceramics and Two Granites as Solid Dielectrics for An Ozone Generator

Ericko Hardiwika^a

Dept.Of Electrical Engineering, Faculty of Engineering

Universitas Riau

Pekanbaru, Indonesia

ericko.hardiwika@student.unri.ac.id

Fri Murdiya^{a,*}

Dept.Of Electrical Engineering, Faculty of Engineering

Universitas Riau

Pekanbaru, Indonesia

frimurdiya@eng.unri.ac.id, <https://orcid.org/0000-0001-8637-369>

corresponding author: Fri Murdiya^{a,}, frimurdiya@eng.unri.ac.id

Abstract— The utilization of ozone is commonly applied in various fields, for instance, it is used as a disinfectant for water treatment, disinfecting, sterilizing medical devices and preserving foodstuffs. Ozone is a nearly colorless gas with a characteristic odor that can be detected by humans at low concentration of 0.01 ppm. It can be produced by the dielectric barrier discharge method, which is generally used as a method of generating ozone supplied by high voltage or also called high voltage plasma generators. High voltage plasma occurs in the dielectric barrier discharge air gap, as a result of the air failed in maintaining its insulator properties. The power supply used in this study is a parallel resonant pushpull inverter using a flyback transformer. Furthermore, this study did not use an additional magnetic loudspeaker and used ceramic dielectrics instead. 5 types of ceramics and 2 different types of granite and combined the range of air gap were used during examination and research. The research indicates that the best plasma was found in ceramics 3, 5, granite 1 and 2 with an air gap of 2 mm. The current discharge in ceramic 1 with an air gap of 2 mm was higher than the others. The highest voltage discharge was on granite 2 with an air gap of 2 mm. Ceramics 3, 5, granite 1 and 2 with an air gap of 2 mm had better ozone concentrations than ceramics 1, 2 and 4.

Keywords— dielectric barrier discharge, ozone, plasma, high voltage generator, ceramics, granite

I. INTRODUCTION

The use of ozone has been widely applied in various fields, such as in Europe, ozone has been used as a disinfectant to treat drinking water in the late 19th century, as well as America and even Japan. Lots of sectors - the use of ozone, including disinfecting, washing and whitening fabrics, aquaculture, sterilization of medical equipment, food preservation and so on [1].

Ozone is a nearly colorless gas with a very characteristic odor that can be detected by the human sense of smell up to a concentration of 0.01 ppm (parts per million). In the open space the maximum ozone concentration is around 0.10 ppm and the highest is 1.00 ppm and can still be considered

harmless as long as it is not inhaled into the respiratory tract for more than 10 minutes [2].

At this time, dielectric barrier discharge (DBD) is known as an effective method for ozone generation. Ozone generation with this method is also referred to as high voltage plasma technology. This technology includes high voltage generating equipment, electrodes, and dielectrics. DBD is a type of nonthermal plasma which generally consists of two electrodes separated by a gap of a few millimeters and covered with a dielectric layer. Where the electrodes are connected with AC (alternating current) high voltage. Dielectric functions as a current limiter, prevents spark formation and evenly distributes discharges throughout the electrode area [3].

The dielectric barrier used as an insulating layer material is such as glass, quartz, ceramics, and a polymer layer. The type of material, thickness and surface structure of the dielectric material can affect plasma discharge. DBD is generally used as technology of ozone generation that supplied by high voltage or also called high voltage plasma generators. High voltage plasma generators are widely used in areas such as the medical, chemical and physical in the world. This technology consists of high voltage generators, electrodes and dielectric parts. How it works is by supplying a high voltage in the dielectric barrier discharge which at a certain value will produce plasma visible to the eye. This plasma occurs because of the failure of a material to maintain its insulating properties [4-6]

Efforts that can be made to increase ozone production and can be achieved in two ways, first step is by optimizing discharge equipment and second step is by combining discharge equipment with catalysts, photocatalysts, or by adding additional fields such as ultrasound and magnetic fields[7].

Based on previous research related to ozone generation with dielectric barrier discharge, this research will develop

research on dielectric barrier discharge without the use of magnetic fields (without the addition of magnetic loudspeakers) and the dielectrics are several brands of floor tiles (ceramics) and granites. So, in order to get the desired results in the form of ozone concentration, plasma form, discharge current and discharge voltage must be tested on several different ceramics with similar distance of 2 mm. So that different results will be obtained for each test.

Ceramic permittivity value is calculated by calculating the value of ceramic dielectric capacitance, air capacitance, air permittivity. The relative permittivity value is related to the capacitance value. The equation for finding the capacitance and relative permittivity values can be calculated using the following equation 1 dan 2.

$$\epsilon_{rk} \cdot \epsilon_0 = \frac{C \cdot d}{A} \quad (1)$$

$$\epsilon_{rk} = \frac{C \cdot d}{A \cdot \epsilon_0} \quad (2)$$

So if the equation 1 and 2 are substituted, then the relative permittivity value of the ceramic dielectric can be calculated using the following equation 3.

$$\frac{C_k}{C_u} = \frac{\epsilon_{rk}}{\epsilon_{ru}} \quad (3)$$

C_k is the measured dielectric ceramic capacitance value, C_u is the measured air capacitance value, ϵ_{rk} is the relative permittivity of ceramics and ϵ_{ru} is the relative permittivity of air. The fixed air permittivity value is 1.

II. RESEARCH METHODOLOGY

The method used in this research is testing at the Electrical Engineering Laboratory of the University of Riau by collecting data on test and research results. This research was conducted to determine the form of plasma, discharge current, discharge voltage, and ozone concentration produced by using 5 types of floor tiles and 2 types of granite with different brands as dielectric and the air gap of 2 mm between the anode electrode and solid dielectric on an ozone generator. The power supply used in this study is a parallel resonant push pull inverter circuit that is controlled by IC CD4047 and it was supplied by smps (switch mode power supply) with an output voltage of 12 VDC that it is presented in Fig. 1.


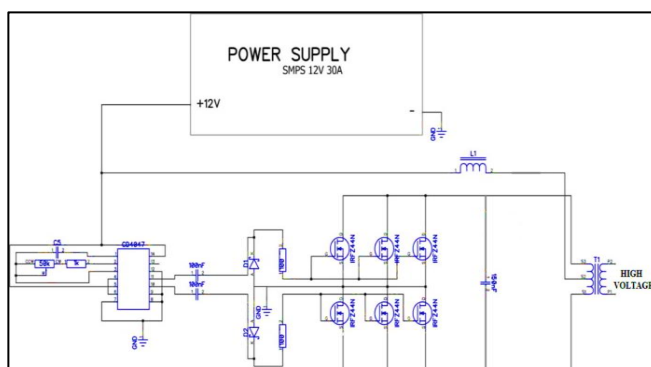



Fig. 1. The schematic diagram of high voltage power supply

In this ozone generator, there was iron plate with dimension 10x10 cm square as anode and cathode electrodes, these plates were attached on the teflon framework. There was a solid dielectric between anode electrode and air gap and

cathode electrode. Air dielectric was also known as air gap. The gap used in this test was 2 mm. Whereas the data retrieval variable was by varying or exchanging all solid dielectrics until completion of the test. The DBD construction and circuit test are presented in figure 2.



(a)

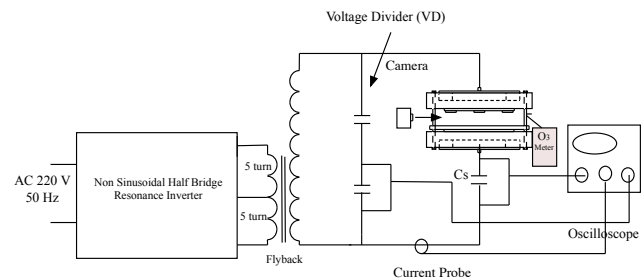

(b)

Fig.2. a. DBD construction and b. circuit test of ozone generator

Current and voltage measurement tools were carried out by connecting them to a digital oscilloscope and also connected to a laptop. A current probe was CC65 Hantek and a high voltage probe was with a ratio of 1: 1000. The plasma photographs were recorded by using a mobile camera and these pictures were measure the light intensity by using the AspectraMini application for Android smartphone. And it can see the spread of plasma in the gap in the ozone generator and the value of the intensity of the plasma light produced in the test. For the measurement of ozone concentration was carried out by using an ozone meter or HT-E-O3.

III. RESULT AND DISCUSSIONS

A. Plasma Pictures

Experiments have been carried out to obtain the plasma form on 5 types of ceramics and 2 types of granite (K 1, K 2, K 3, K 4, K 5, G 1 and G 2) using the AspectraMini application.

K	Gap of 2 mm
K 1	
K 2	
K 3	
K 4	
K 5	


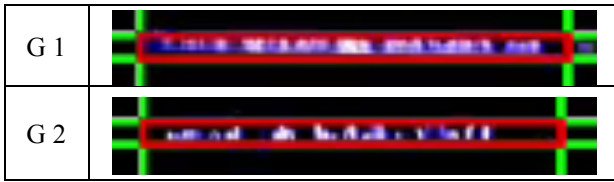


Fig.3. Plasma pictures for all solid dielectrics


The testing ways were done by combining the distance (gap) between the two electrodes. The gap varied in this test is 2 mm. The results of testing the plasma form are in the following Fig.3. K3, K4 and G1 are seen that the plasma distribution is tight along the surface of solid dielectric. While plasma in other ceramics and granite shows that the plasma distribution is not tight.

B. Voltage and Discharge Current


Current and voltage testing are carried out on 5 types of ceramics and 2 types of granite, the voltage is measured using a high-voltage probe and the current measurement is by using a current probe. The characteristics of voltage-current are presented in Fig.4. For all ceramics and G1, the currents have a lot of pulses in positive cycle. It is also indicated that there are many micro discharges in the gap. Whereas, in G2, the current pulses occur in negative cycle. Then, the current and voltage values have the highest current value of 40.8 mA in K1 and the highest voltage value is 8 kV in G2.

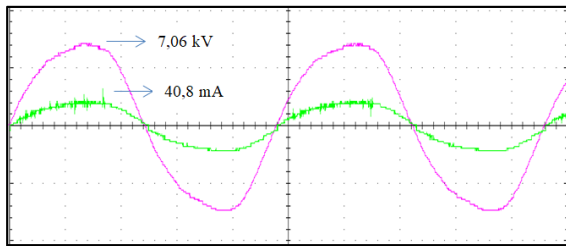


K1

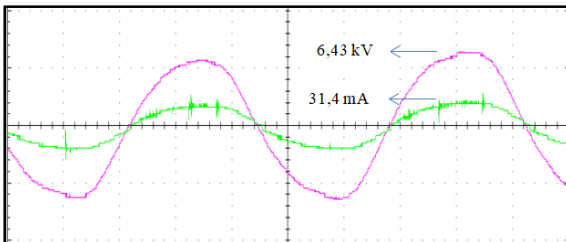


K2

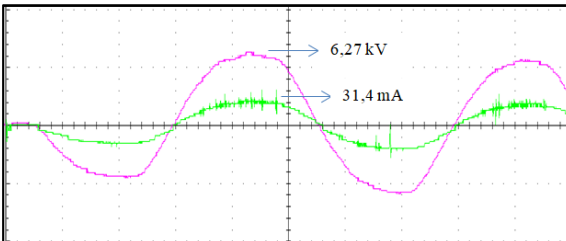


K3

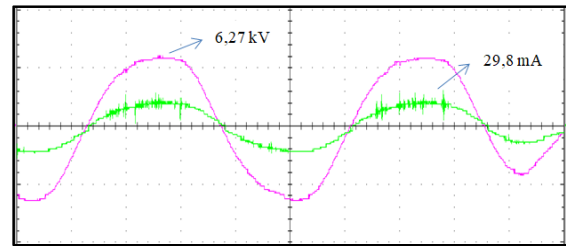


K4

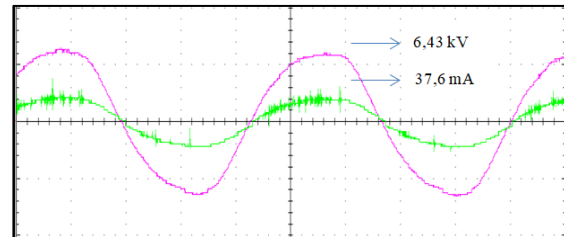

K5

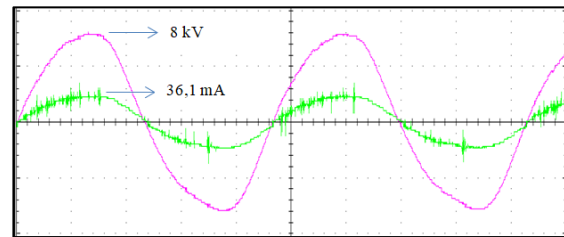

G1

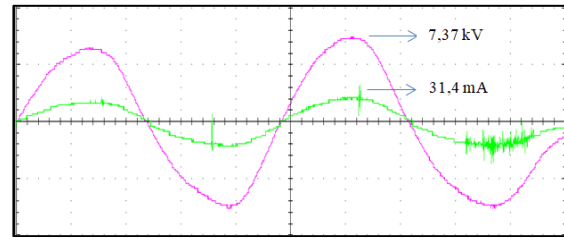

G2

Fig.4. Voltage and discharge current for all solid dielectrics

C. Ozone Production

Measurement of ozone concentration is carried out using HT-E-O3. The unit of this ozone concentration is ppm (parts per million). This measuring instrument is able to measure the concentration of ozone produced up to 225 ppm. The air compressor pump blows the air into the air gap, so the amount of oxygen sprayed is more and faster. This wind compressor is placed in the lid of the tap and must be in line with the gap on the ozone generator.

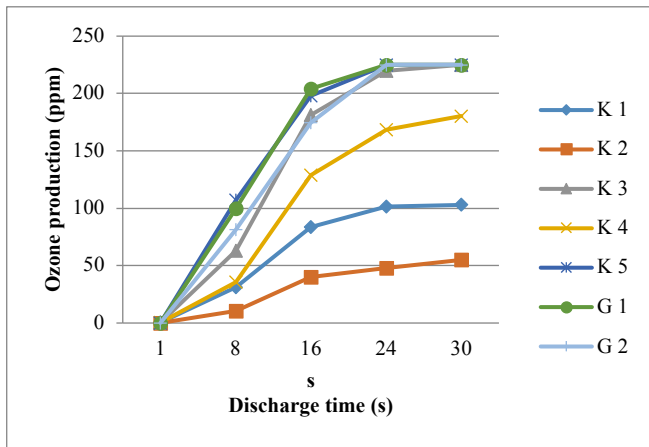


Fig.5. Ozone production for all solid dielectric combinations

It is shown that K3, K5, G1 and G2 can produce ozone gas until top values after 30 seconds discharge. K1, K2, K4 are slowly increase for producing ozone.

IV. CONCLUSIONS

The best plasma shape are K3, K5, G1 and G2 when the gap (distance) is 2 mm. Voltage and current discharge also indicated that those solid dielectrics have many current pulses. Those are also produce the ozone gas until 200 ppm after 30 s discharge.

Acknowledgment

We thank to LPPM UNRI for financial support through Penelitian Percepatan Inovasi year 2019. This contract number is : 1026/UN.19.5.1.3/PT.01.03/2019.

REFERENCES

- [1] Prihatinningtyas, E, 2006. *Ozon Suatu Dilema*, Warta Limnologi, No. 40, Oktober 2006.
- [2] Agus Purwadi, Widdi Usada, Suryadi, Isyuniarto, Sri Sukmajaya, 2003. "Konstruksi Pembangkit Ozon Bentuk Silinder dengan Teknik Lucutan senyap" *Jurnal Putlisbang Teknologi Maju BATAN*, Yogyakarta.
- [3] Sosiawati Teke, Muhammad Nur, Tri A Winarni, 2014. "Produksi Ozon dalam Reaktor Dielectric Barrier Discharge Plasma (DBDP) Terkait Panjang Reaktor dan Laju Alir Udara Serta Pemanfaatannya Untuk Menjaga Kualitas Asam Amino Ikan", Universitas Diponegoro, Semarang.
- [4] F. Murdiya, A. Hamzah and D. Andrio, "The Application of Non-Sinusoidal Resonance Inverter on An Ozone Generator," *2019 IEEE Conference on Energy Conversion (CENCON)*, Yogyakarta, Indonesia, 2019, pp. 142-146. doi: 10.1109/CENCON47160.2019.8974757
- [5] Murdiya, F., Suwitno, Anto, B., Ervianto, E., Hamdani, E., & Amri, A. (2018). "Barrier Discharge In Magnetic Field: The Effect Of Magnet Position Induced Discharge In Gap". 2018 2nd International Conference on Electrical Engineering and Informatics (Icon EEI 2018), Batam-Indonesia,
- [6] Murdiya, Febrizal, Amun Amri. 2017. "The performance of surface barrier discharge in magnetic field driven by half bridge series resonance converter", *Journal of Mechatronics, Electrical Power, and Vehicular Technology*, Vol.8, No.2, pp.95-102.
- [7] Peka'rek, S. (2018). Experimental Study of Pulse Polarity and Magnetic Field on Ozone Production of the Dielectric barrier dischargein Air. *Plasma Chemistry Plasma Processing*, Springer.

